



BUILDING-IN AND CONNECTION

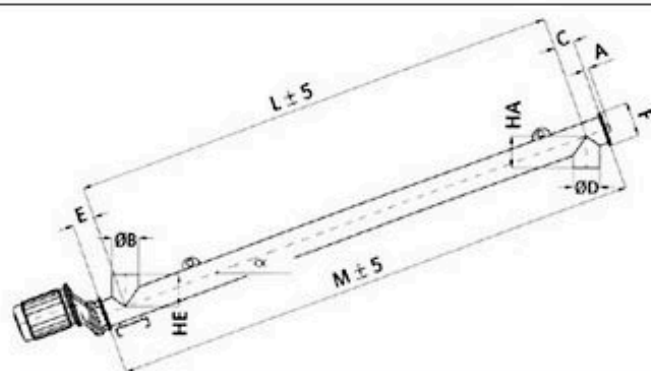


| | Screw diameter | | | | |
|----|---|-----|-----|-----|-----|
| | 168 | 193 | 219 | 273 | 323 |
| A | 40 | 40 | 40 | 40 | 40 |
| ØB | according to customer request - see page "inlets and outlets" | | | | |
| C | 140 | 150 | 160 | 180 | 220 |
| ØD | according to customer request - see page "inlets and outlets" | | | | |
| E | 160 | 170 | 180 | 220 | 220 |
| L | according to customer request | | | | |
| HE | according to customer request - see page "inlets and outlets" | | | | |
| HA | according to customer request - see page "inlets and outlets" | | | | |
| oo | 0-45° according to customer request | | | | |
| M | L+C+E | | | | |

| Output in kW | Installation dimensions, gear motor U 2.1 | | | | |
|--------------|---|-----|-----|-----|-----|
| | O | P* | S | R | Q |
| 2,2 | 222 | 298 | 150 | 158 | 125 |
| 3 | 222 | 298 | 150 | 158 | 125 |
| 4 | 222 | 325 | 150 | 158 | 125 |
| 5,5 | 222 | 358 | 150 | 158 | 150 |
| 7,5 | 222 | 399 | 150 | 158 | 150 |
| 9,2 | 222 | 476 | 150 | 158 | 175 |
| 11 | 222 | 476 | 150 | 158 | 175 |

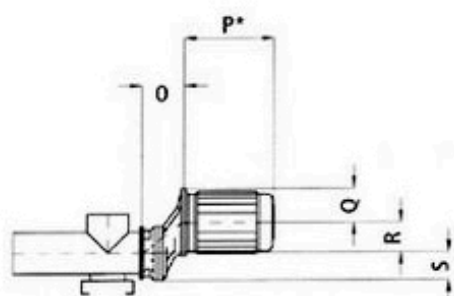

| Output in kW | Installation dimensions, gear motor U 3.1 | | | | |
|--------------|---|-----|-----|-----|-----|
| | O | P* | S | R | Q |
| 4 | 268 | 325 | 205 | 200 | 125 |
| 5,5 | 268 | 358 | 205 | 200 | 150 |
| 7,5 | 268 | 399 | 205 | 200 | 150 |
| 9,2 | 268 | 476 | 205 | 200 | 175 |
| 11 | 268 | 476 | 205 | 200 | 175 |
| 15 | 268 | 476 | 205 | 200 | 175 |
| 18,5 | 268 | 519 | 205 | 200 | 175 |
| 22 | 268 | 519 | 205 | 200 | 175 |

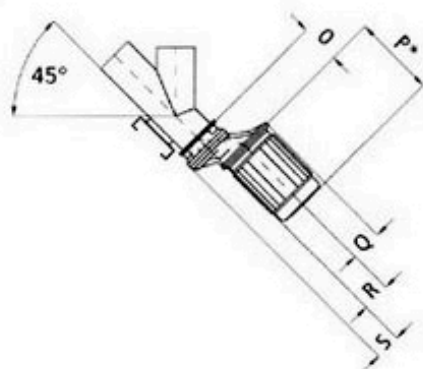


Dimensions for 4-pole motors

* Depending on make. Table values without guarantee. Technical specifications subject to change.

STANDARD CONNECTION FLANGES

| DN | A | B | C | E | | S* mm |
|-----|-----|-----|-----|----|----------------|-------|
| | | | | Ø | n ^o | |
| 150 | 170 | 200 | 228 | 14 | 4 | 6 |
| 175 | 195 | 250 | 278 | 14 | 4 | 6 |
| 200 | 221 | 250 | 278 | 14 | 4 | 6 |
| 250 | 275 | 300 | 328 | 14 | 8 | 6 |
| 300 | 325 | 350 | 378 | 14 | 8 | 6 |
| 350 | 358 | 400 | 440 | 14 | 8 | 8 |



Special connection pieces and flanges to customer specifications

S* = Blade thickness - n^o = number of holes