

BS Vertriebsbüro GmbH

Silo-Anlagenbau - "Your specialist in silo components"

Pillauer Str. 2 · D-74336 Brackenheim
Fon ++49 (0)7135 12409 · Fax ++49 (0)7135 933599
e-mail: info@bs-vertrieb.de

[Home](#)

[e-mail / Contact](#)

[Impressum](#)

[Allgemeine Geschäftsbedingungen](#)

Jet Loaders + Loaders / chute

- [Jet-Loader Quadro
Type JBM 220](#)
- [Jet Loader Rondo
Type JBM 250](#)
- **Jet Loader
Tele-Rondo
Type JBM 200**
- [Gravel loader
Rondo Type DN 500,
600, 800](#)
- [Variable dust skirt
Type Rondo 250](#)
- [Big-Bag-
filling System](#)
- [Big-Bag-
discharge system](#)
- [Impeller packer for
valve bags](#)
- [Bucket elevators](#)
- [Bucket conveyors](#)
- [Concrete block
making machine
ABS](#)

Jet Loader Tele-Rondo Type JBM 200



Areas of application:

The loader **TYPE JBM 200 TELE-RONDO** is a special loader for the charging of silo vehicles which are to be loaded with easily de-mixable bulk goods such as, for example, dry mortar. Bulk goods of varying weights and large fall heights cause de-mixing problems if standard loaders are employed.

This leads to quality losses.

The de-mixing of such bulk goods will practically be prevented by using the **TELE-RONDO TYPE JBM 200**.

Operation:

Place the silo vehicle under the **TELE-RONDO** with a precision of 50 mm. The **TELE-RONDO** discharge cone sets itself on to the silo dome opening and the telescoping pipes dip further into the silo vehicle.

Thus, only a free fall height of 200 - 400 mm remains. Because of the minimum free fall height and the automatic gradual raising of the telescoping pipes via the level control as the vehicle is filling, the demixing of bulk good components with differing weights is prevented.

When the maximum filling level in the silo vehicle is reached, two maximum level indicators see to it that either the filling equipment is shut off or shut-off devices are switched off to close.

When the **TELE-RONDO** is raised the closure cone prevents post trickling of material and the ingress of circulation air and thus humidity into the loader.

Material/design:

Steel and various stainless steels are available. Painting is hammer tone, silver grey, other finishes on request

Technical data:

Nominal width: 200 mm

Capacity: 100 m³/h

Lower edge of the discharge cone (extended): approx. 3.400 mm



Lifting motor: 1,1 kW

Lifting motor voltage: 400, 500, 690/50 Hz

Level indicator and maximum level indicator voltage: 24V/DC

Advantages:

- Mature technology through further development of the JET LOADER TYPE JBM 220 QUADRO
- Integrated level indicator automatically adapts the telescoping length of the loader to the actual filling level
- TELE-RONDO in conjunction with cross- and length positioning equipment represents the optimum loading solution for special, de-mixing prone bulk goods

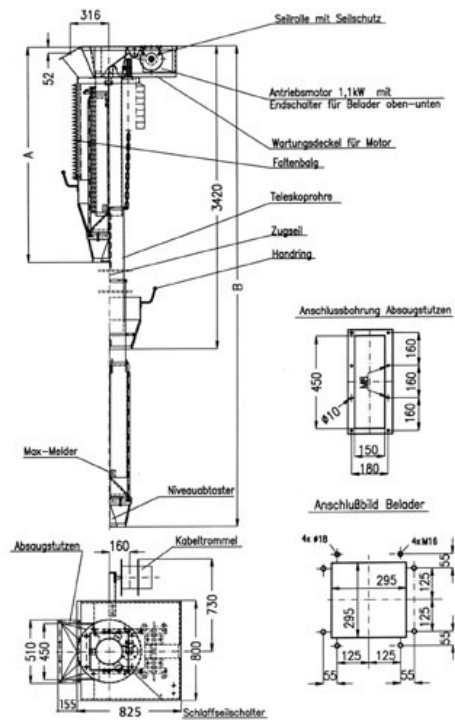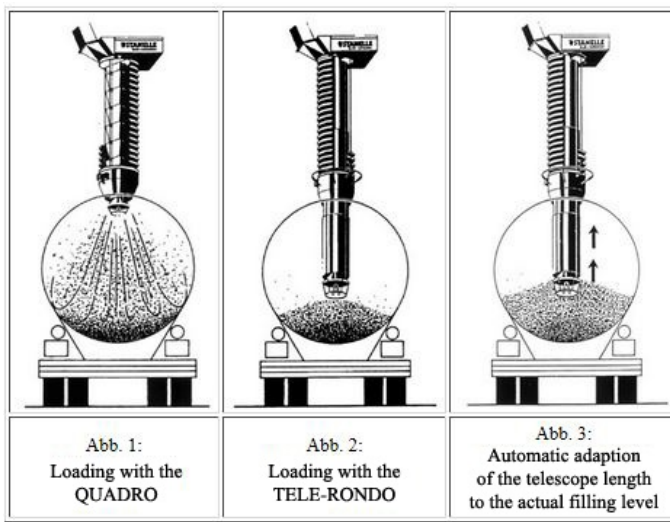

	standard	contracted version
A	1800	1590
B	4600	3600
lift	2480	2100

[→ back to product survey](#)