


Pneumatic Pinch Valve TYPE V

Flange type DN 40 to 250 mm



Variations

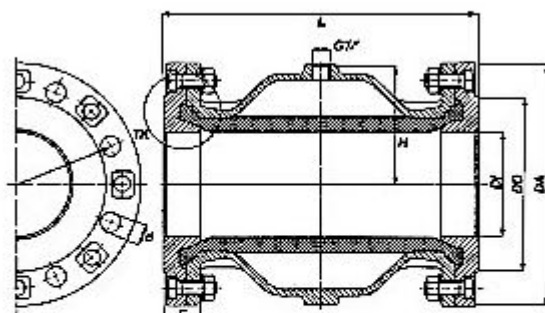

with flange sleeve



stainless steel-/
steel bushing



internal thread (DN
40 - 100)

Special construction i.e. for food and
pharma application upon request.

DN (mm)	DI (mm)	DA (mm)	DD (mm)	d (mm)	screws	TK (mm)	L (mm)	H (mm)	E (mm)	weight (kg)		volume (l) (approx.)	P max. (bar)
										alu flanges	cast-iron flanges		
40	40	150	88	18	4	110	155	63,0	32,0	3,2	4,9	0,20	6
50	50	165	102	18	4	125	183	60,0	30,0	3,5	-	0,25	6
65	60	185	122	18	4	145	183	77,0	32,0	5,0	8,2	0,40	6
80	75	200	133	18	8	160	227	89,0	32,0	6,0	9,3	1,10	6
100	100	220	159	18	8	180	281	107,0	35,0	8,0	-	1,30	6
125	120	250	184	18	8	210	350	130,0	39,0	12,0	17,5	2,60	6
150	145	286	212	22	8	240	420	155,5	43,0	17,0	25,0	4,90	6
200	190	340	269	22	8	295	555	201,0	60,0	35,0	51,0	15,00	4
250	250	395	320	22	12	350	610	258,0	49,0	-	84,0	30,00	2

MATERIALS:

Sleeves:

natural rubber antiabrasive, natural rubber food quality, natural rubber high temp., Nitrile, EPDM, Viton, Silicone, Neoprene, Hypalon, Butyl

Flanges:

aluminium casting, aluminium casting with (stainl.) steel bushing, cast iron, satinl. steel, steel (DN 250)

Body:

aluminium, stainless steel, steel (DN 250)

Other materials upon request.

Accessories:

solenoid valves, pressure switches, pressure regulators, pressure relief units, etc.